



OmniControl 001 Mobile, control units




Similar Image

OmniControl 001 Mobile, control units

- Universal control device for all products with Pfeiffer Vacuum RS-485-Protocol
- Easy operation via 3.5" touch display
- Uncomplicated data collection and processing between the Pfeiffer Vacuum devices
- The respective modules define the scope of functions

Dimensions

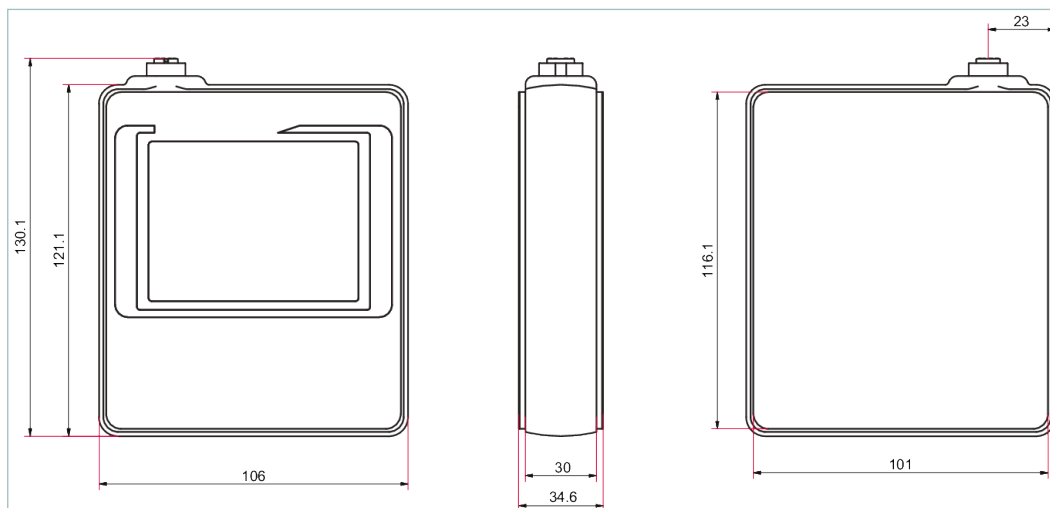

Technical Data	OmniControl 001 Mobile, control units
Ambient temperature	0-50 °C 32-122 °F 273-323 K
Power consumption max.	18 W
Protection degree	IP20
Weight	300 g

Order number	
OmniControl 001 Mobile	PE D20 000 0

Accessories	
Adapters (electrical) RS-232/485	
Y-connector M12 for RS-485	P 4723 010
Cables Connection cables	
Connection cable MVP-TC-TPS, 3 m	PE 100 013 -T
Connection cable, angled, with RS-485 interface and two accessory ports from TC 80/110/120 to power supply pack, 1 m	PM 071 655 -T
Connection cable for HiPace with TC 400/TM 700 to power supply pack TPS/DCU 310/311/400/401	PM 061 352 -T
Cables RS-485 Interface cables	
Interface cable, M12 m straight/M12 m straight, 3 m	PM 061 283 -T

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.