



# TPG 366 controller for 6 gauges




Similar Image

## TPG 366 controller for 6 gauges

- For operation of six gauges with analog output signal
- Brilliant display
- Simultaneous display of six pressure readings
- Six freely configurable relay set points
- Versatile connectivity: USB, RS-485, Ethernet
- Direct data storage on USB flash memory (data and settings)
- Can be used as table top or as rack mount unit

### Dimensions

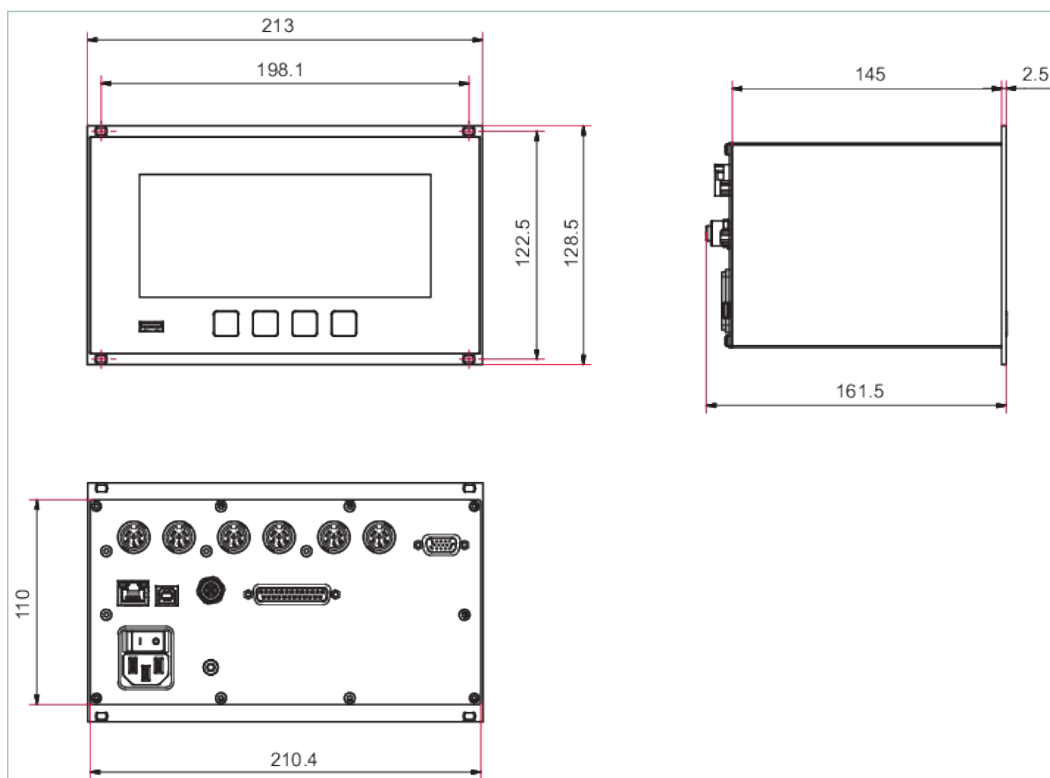

Technical Data	TPG 366 controller for 6 gauges
Ambient temperature	5-50 °C   41-122 °F   278-323 K
Automatic changeover: Pirani cold cathode	Configurable
Connection for gauge	6
Display rate	10 Hz
Error signal: Working contact, potential-free	1 Pcs.
Filter time constant, rapid/normal/slow	0.02 s / 0.15 s / 0.75 s
I/O interfaces	USB, RS-485, Ethernet
Mains connection: frequency (range)	50/60 Hz
Mains connection: power consumption	≤ 200 VA
Mains connection: voltage (range)	100 – 240 V
Measurement rate	100 Hz
Measuring channel	6 Pcs.
Measuring range	5 · 10 <sup>-11</sup> – 5.5 · 10 <sup>4</sup> hPa
Number of switch-points	6 Pcs.
Power consumption max.	200 VA
Protection degree	IP30

Technical Data	TPG 366 controller for 6 gauges
Safety	CE UL
Signal output: Measured value, analog	0 – 10 V
Switch-point: Current AC	1 A
Switch-point: Current DC	0.5 A
Switch-point: Two-way contact, potential-free	6 Pcs.
Switch-point: Voltage AC	30 V AC
Switch-point: Voltage DC	60 V DC
Temperature: Storage	-20-60 °C   -4-140 °F   253-333 K
Weight	2.2 kg   4.85 lb

Order number	
TPG 366	PT G28 770

Accessories	
<b>Cables Measurement cables</b>	
Measurement cable, 1 m	PT 448 248 -T
Measurement cable, 3 m	PT 448 250 -T
Measurement cable, 6 m	PT 448 251 -T
Measurement cable, 10 m	PT 448 252 -T
Measurement cable, 15 m	PT 448 253 -T
Measurement cable, 20 m	PT 448 254 -T
Measurement cable, 25 m	PT 448 255 -T
Measurement cable, 30 m	PT 448 256 -T
Measurement cable, 35 m	PT 448 257 -T
Measurement cable, 40 m	PT 448 258 -T
Measurement cable, 45 m	PT 448 259 -T
Measurement cable, 50 m	PT 448 260 -T
<b>Software Display &amp; Data logging</b>	
Software for display and data logging for ActiveLine	PT 882 550 -T

## VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

## COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

## COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a  
perfect vacuum solution?  
Please contact us:

Pfeiffer Vacuum GmbH  
Headquarters · Germany  
T +49 6441 802-0  
info@pfeiffer-vacuum.de

[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

All data subject to change without prior notice.